




# TeeJet Strainer - Poly 5lb Spring / 50 Mesh

RTJ4193A-PP-5-50SS

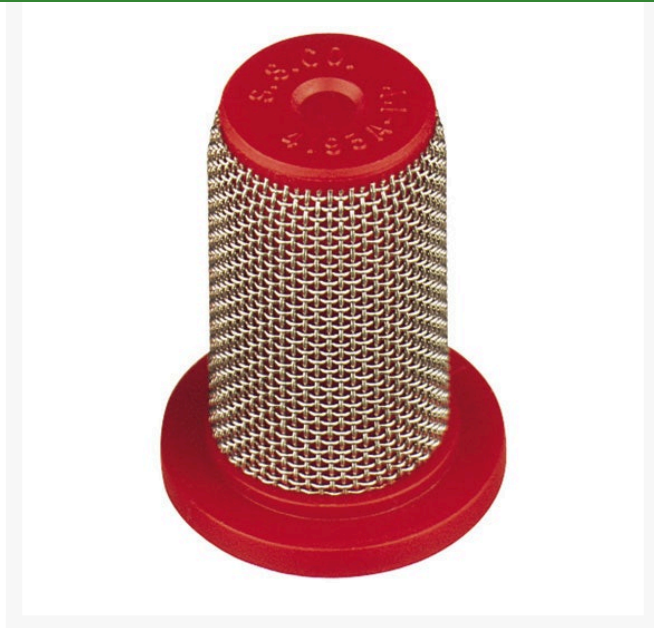

## Details

Minimizes nozzle dripping. Fits all TeeJet nozzles. Ball check opens at 5 psi (0.34 bar). Recommended for flow rates up to 0.8 GPM (3 l/min). 24, 50, 100 and 200 mesh screens. Not for use with AI or DG tips. Note: Use of these ball check valves results in a pressure drop of 5 psi ((0.34 bar) to 10 psi (0.7 bar) depending on spring rating.

## Specifications

Manufacturer	TeeJet
--------------	--------

## Evergreen

C/. Bartomeu Amat, 2, Entlo 1 Terrassa, 08225  
+34 931 130 054

<https://evergreen.rrproducts.com/>